

BUCKRAM PREMIUM

TECHNISCHE SPECIFICATIES

TECHNICAL SPECIFICATIONS
TECHNISCHE DATEN



BUCKRAM PREMIUM

ketting/warp/Kette	20,5 draden/threads/Fäden per cm 50% katoen/cotton/Baumwolle, Nm 34 50% polyester
inslag/weft/Schuss	18 draden/threads/Fäden per cm 50% katoen/cotton/Baumwolle, Nm 28 50% polyester
gewicht/substance	232 g/m ²
dikte/caliper/Dicke	ca. 0,30 mm
lengte/roll size/Länge	50 meter
breedte/width/Breite	108 cm 108 cm benutbare breedte/usable width/Nutzbreite



van Heek textiles

Een tijdloos en degelijk product dat door de combinatie van polyester en katoen voldoet aan alle eisen op het gebied van treksterkte en slijtvastheid. Door de pu topcoating heeft Buckram Premium een hoog vuil- en waterafstotend vermogen.

The combination of polyester and cotton results in a classic and durable product that meets all requirements concerning tensile strength and wear-resistance. The pu top coating gives Buckram Premium its high dirt- and water-resistant qualities.


Ein zeitloses und haltbares Produkt, das durch die Kombination von Polyester und Baumwolle alle Anforderungen an Zug- und Verschleißfestigkeit erfüllt. Durch die Oberflächenbeschichtung aus Pu ist Buckram Premium enorm schmutz- und wasserabweisend.



van Heek textiles

L. van Heek Textiles
P.O. Box 1
7580 AA Losser-Holland
Gronausestraat 309
Telephone +31(0)53 5371111
Fax +31(0)53 5371140
info@vanheektextiles.com
www.vanheektextiles.com

BUCKRAM PREMIUM

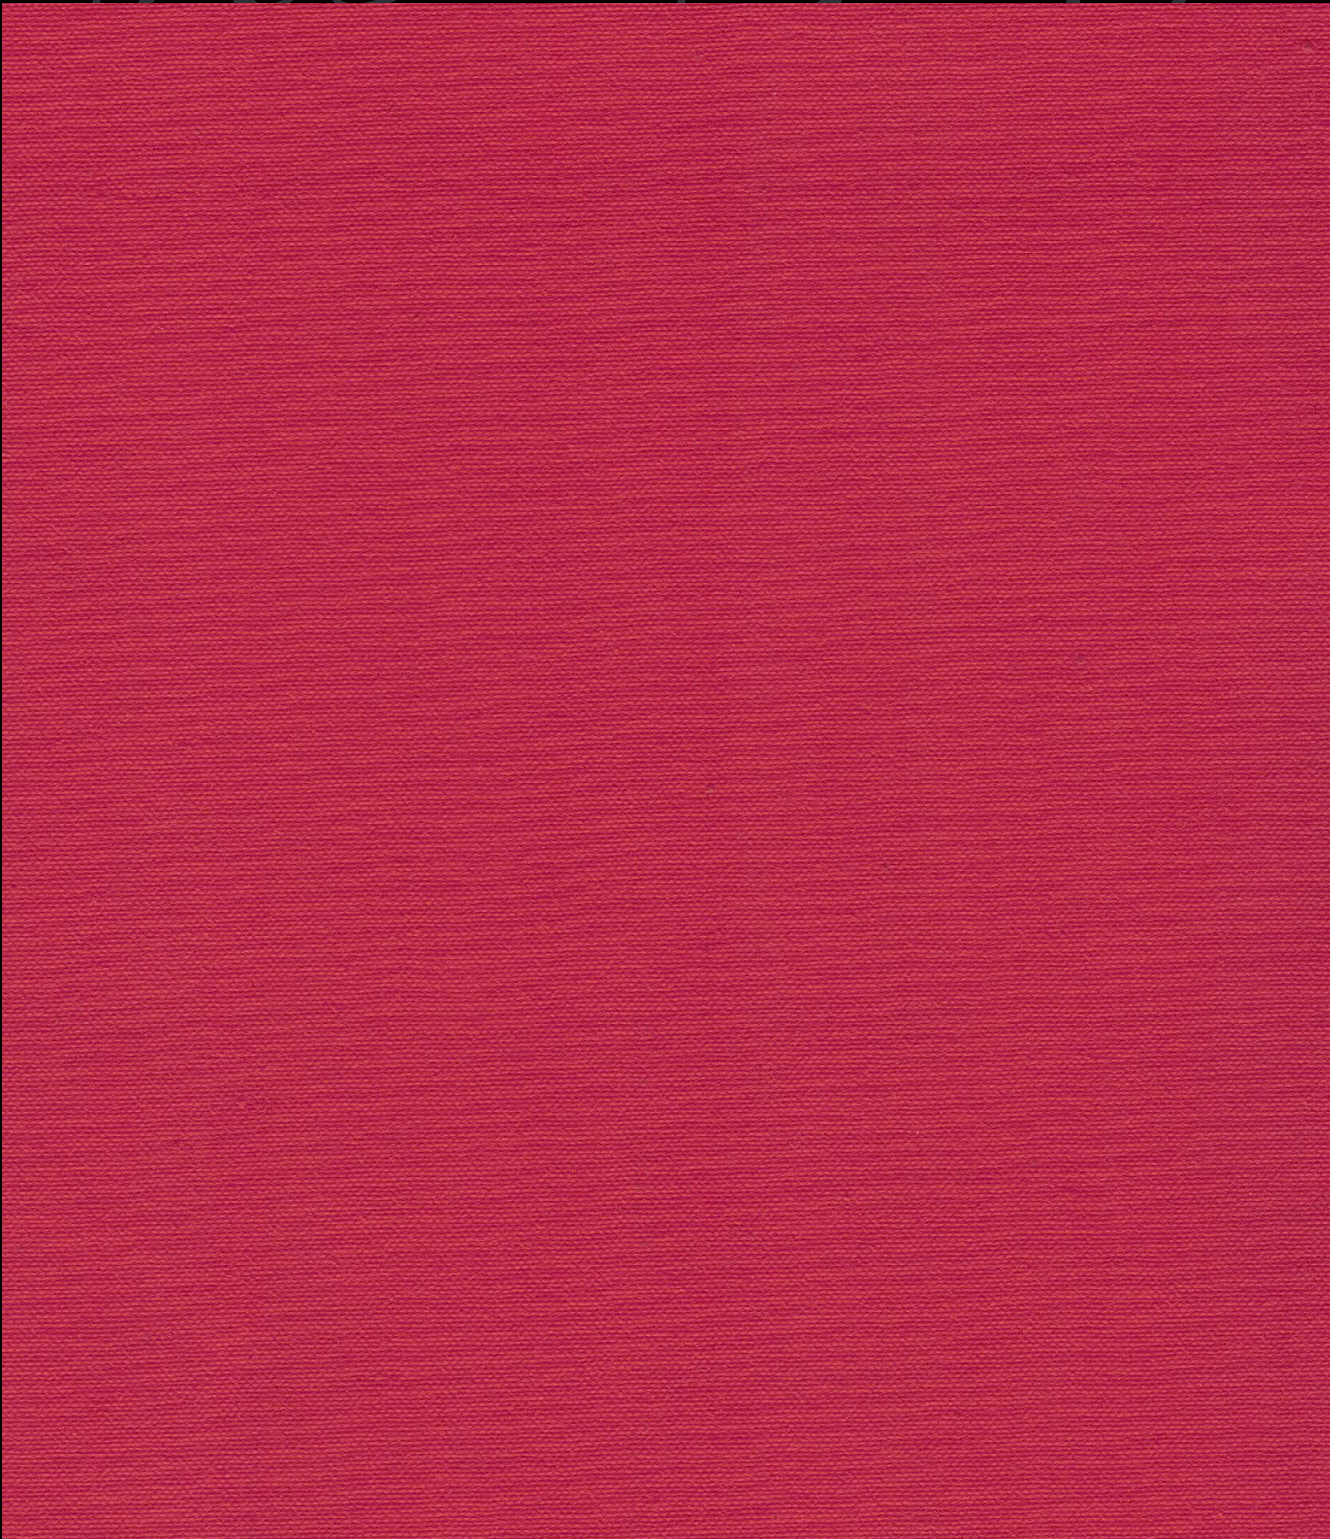

29014 Technische specificaties: zie achterzijde / Technical specifications: see back of card / Technische Daten: siehe Rückseite



29011



29013



29005


BUCKRAM PREMIUM




29009



29012



29010



29015



29008



29016



29030



29031



29004



29019



29025



29001



29032



29006



29003



29022



29020



29023



29002



29000



29026



29007